

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/028349 A1

(51) International Patent Classification⁷: B65H 5/02

(21) International Application Number:
PCT/JP2004/013865

(22) International Filing Date:
15 September 2004 (15.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-324927 17 September 2003 (17.09.2003) JP

(71) Applicant (for all designated States except US): RICOH
COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome,
Ohta-ku, Tokyo 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MAKI, Tsu-
neo [JP/JP]; 12-15, Higashiikuta 4-chome, Tama-ku,
Kawasaki-shi, Kanagawa 2140031 (JP). MISUMI,
Tomiyoshi [JP/JP]; 7-25, Miharuno 2-chome, Atsugi-shi,
Kanagawa 2430208 (JP). TSUKAMURA, Kiyoshi

[JP/JP]; 7-12-201, Tomuro 4-chome, Atsugi-shi, Kana-
gawa 2430031 (JP). ITOH, Yohichi [JP/JP]; 5-8-205,
Saiwaicho, Atsugi-shi, Kanagawa 2430012 (JP). AOKI,
Hideo [JP/JP]; 39-27-410, Nagatasannohdai, Minami-ku,
Yokohama-shi, Kanagawa 2320074 (JP).


(74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden
Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo
1506032 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: BELT CONVEYANCE APPARATUS AND IMAGE FORMING APPARATUS USING SUCH A BELT CON-
VEYANCE APPARATUS

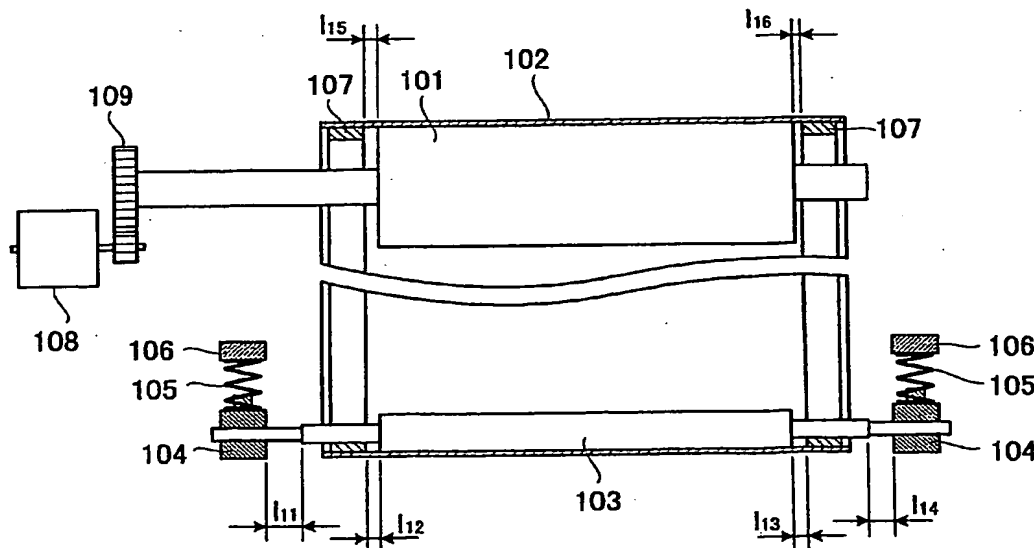

(57) Abstract: In an intermediate transfer part (100), a bead 107 is formed on an inner side of an intermediate transfer belt (102), which is rotated by an intermediate transfer belt drive roller (101). Driven roller bearings (104a, 104b) support an intermediate transfer belt driven roller (103). The intermediate transfer belt driven roller (103) is movable in a thrust direction. Ends of the intermediate transfer belt driven roller (101) and the intermediate transfer belt driven roller (103) interfere with a bead (107) so as to restrict a deflection of the intermediate transfer belt in the thrust direction. The intermediate transfer belt driven roller (103) is movable in the thrust direction against a deflection of the intermediate transfer belt (102).



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*